



**TRI-CELL ENTERPRISES**

Canadian Distributor of fine audio products

Acoustic  
Solid

## Tonearm & Cartridges

### WTB 213s *Carbon Arm Tube*




Length: 233mm  
Overhang: 16mm  
Offset Angle: 23.5 degree  
Pickup Weight: 5 - 20 gram  
Mounting Distance: 216mm

### WTB 213 *Carbon Arm Tube*



Length: 233mm  
Overhang: 16mm  
Offset Angle: 23.5 degree  
Pickup Weight: 5 - 20 gram  
Mounting Distance: 216mm

### WTB 313 *Carbon Arm Tube*

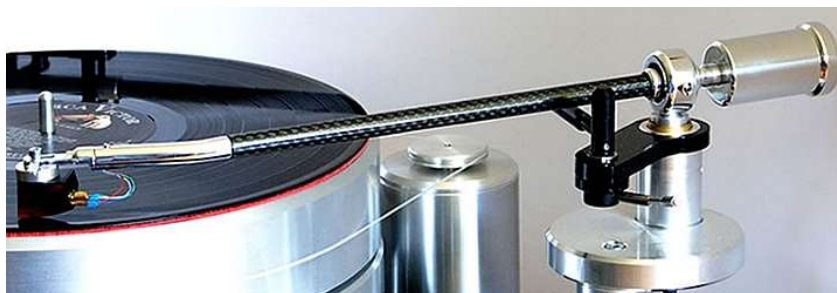

Length: 317mm  
Overhang: 13mm  
Offset Angle: 17.3 degree  
Pickup Weight: 8 - 25 gram  
Mounting Distance: 304mm



**TRI-CELL ENTERPRISES**

Canadian Distributor of fine audio products

*Acoustic  
Solid*

## Phono Pre-amplifier



### Phono Preamp MM + MC

Frequency Reponse: 10Hz to 20kHz (+-0.2db)

Distortion: <0,005%

Signal-to-noise: > 99 dBA bis > 76dBA relative to 2 V rms Rated Output voltage depending on gain

Crosstalk attenuation: > 103 dB relative to 2 V rms Rated Out voltage

Input impedance per Input: 50ohm...680 Ohm in 10 Ohm steps and 47 kOhm

Input capacitance per Input: 100pF...600pF in 50 pF steps

Amplification: +32dB...+64dB at 1 kHz in 4 dB steps

Output Level: 10 V rms max. Output Current: 35 mA rms max. Output Impedance: 50 oHm

Dimensions: 140 x 64 x 178 mm

Weight: 1 kg